



Front View

PROPERTIES

Automatic barrier with smartphone control feature

Solar powered

Operating autonomy up to 1 year (rechargeable li-ion batteries)

Automatic closing feature

Manual control possibility

Constant power supply option

TECHNICAL INFORMATION

1. Composition:

Arch – galvanized, powder coated steel
 Case – galvanized, powder coated steel
 Mechanism assembly – stainless steel
 Base – galvanized steel

2. Battery:

Rechargeable li-ion batteries
 Single battery pack: 3500 mAh, 7,4 V
 Double battery pack: 7000 mAh, 7.4 V

3. Mains supply:

Possible – 90-250V – 0.6A – 50/60 Hz

4. Operating parameters:

Temperature from -20 ° C to + 60 °
 Humidity from 5% to 90%
 Altitude up to 2000m
 Power fluctuations + 20% and -15%

5. Dimensions:

Barrier closed: 68mm (H) x 331mm (W) x 918mm (L)
 Barrier opened: 517mm(H) x 331mm (W) x 918mm (L)

6. Weight:


15kg




Top View



Arch Closed

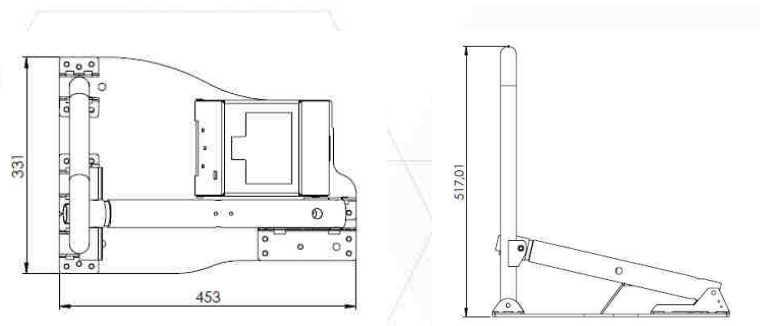

Raised Barrier

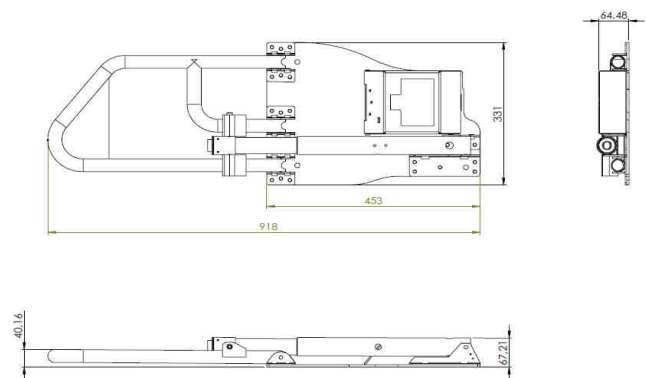

Lowered Barrier

INSTRUCTIONS AND SUPPORT:

www.parklio.com/support/

APPLICATION DOWNLOAD:

(Android) https://play.google.com/store/apps/details?id=com.parklio.parklio746237&hl=en_US

(Apple) <https://itunes.apple.com/hr/app/parklio/id1316429271?mt=8>